

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
5 February 2004 (05.02.2004)

PCT

(10) International Publication Number
WO 2004/011755 A1

- (51) International Patent Classification⁷: **E06B 3/54**, E04B 2/92, E04F 13/14, B32B 17/10
- (21) International Application Number: PCT/US2003/024118
- (22) International Filing Date: 31 July 2003 (31.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/400,234 31 July 2002 (31.07.2002) US
- (71) Applicant (*for all designated States except US*): **E.I. DU PONT DE NEMOURS AND COMPANY** [US/US]; 1007 Market Street, Wilmington, DE 19898 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **BENNISON, Stephen, J.** [US/US]; 110 Alapocas Drive, Wilmington, DE 19803 (US). **SANDEN, Bjorn, A.** [CH/NL]; Eikelhof 9, NL-4641 JL Ossendrecht (NL).
- (74) Agent: **DOBSON, Kevin, S.**; E.I. Dupont de Nemours and Company, Legal Patent Records Center, 4417 Lancaster Pike, Wilmington, DE 19805 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
- with international search report
 - before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: POINT ATTACHMENT SYSTEMS FOR LAMINATED GLASS AND A PROCESS FOR PREPARING SAME

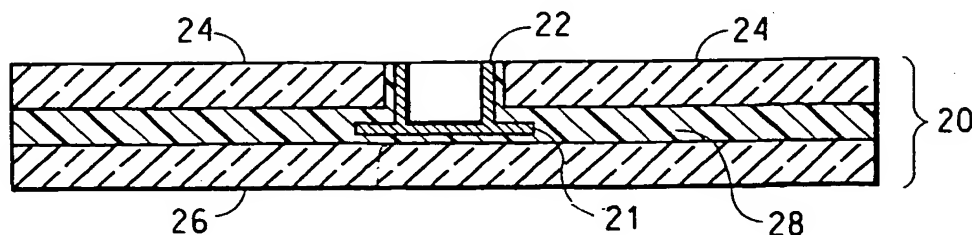

(57) Abstract: The present invention is a direct-point attachment glazing (bolted glass) system (20) comprising: (1) a polymer interlayer (28); (2) at least one sheet of glass (24); (3) at least one receptor for an attachment means; and (4) at least one attachment means, wherein the polymer interlayer (28) is bonded on at least one surface to at least one sheet of glass (24), and wherein at least one receptor (22) is adhesively bonded to the glass by the polymer interlayer (28) in such a way that the receptor (28) is positioned to mechanically accept the attachment means.

THIS PAGE BLANK (USPTO)

**POINT ATTACHMENT SYSTEMS FOR LAMINATED GLASS AND A
PROCESS FOR PREPARING SAME**

5 This Application claims the benefit of U.S. Provisional Application
No. 60/400,234, filed July 31, 2002.

BACKGROUND OF THE INVENTION

10 Laminated glass can be useful in homes and buildings; shelving in
cabinets and display cases; and other articles where improved safety
performance is desirable in glass. In architecture, there can be
advantages in attaching glass to frames and building support structures by
means of direct point-support systems that employ bolts and/or other non-
adhesive fasteners. For example, bolted glazing systems allow for the
15 design of high vision area, highly transparent facades. U.S. Patent No.
4,406,105 and U.S. Patent No. 4,680,206, and EP No. 0 735 227 B1
teaches the use of point-attachment systems for structural glass
assemblies.

20 Producing glazing systems that can be fastened to support
structures via direct-point attachment (hereinafter "bolted glass") is not
trouble free. Using bolted glass systems can be difficult due to various
factors inherent in a conventional bolted glass process. For example,
bolted glass systems require the use of tempered glass, which can result
in reduced optical clarity and pose a risk of spontaneous breakage due to
25 Nickel Sulfide inclusions and service-induced deep scratches.

30 Conventional laminated safety glass generally comprises
thermoplastic sheeting bonded between sheets of glass or other
transparent plastic materials. These laminated glass composites are
required to perform to stringent requirements including impact
performance, weatherability, and transparency. However, the presence of
the polymer interlayer can also cause difficulties when using bolted glass.
If the glass is broken accidentally, the attachment of the bolted system is

maintained by clamping across random glass fragments minimally attached to the interlayer. The concentrated connection forces that are characteristic of bolted glass often cause the broken glass fragments to cut through the interlayer thus severing the connection between the bolted glass laminate and building support structure. This cutting of the interlayer is exacerbated at elevated temperatures of 50°C and greater due to interlayer creep. This performance challenge is manifest in diminished post-glass breakage integrity of a bolted glass laminates after accidental glass breakage.

Another concern when using bolted glass laminates is keeping the holes of the interlayer aligned with the holes in the glass during the laminating process. U.S. Patent No. 5,787,662 describes elaborate construction elements that attempt to deal with this issue of hole alignment between glass plies. There are still further problems that can occur with bolted laminated glass systems relative to the compatibility between the interlayer and the fastener, and also the durability of the attachment. Interlayer-glass delamination problems are commonly seen around the attachment holes required to accommodate the bolt fixtures. Where bolted laminated glass is employed for enhanced safety, one glass-ply and polymer interlayer are often treated as a redundant structural components. EP 0 651 113 B1 claims an attachment system for bolted glass laminates that structurally utilizes one ply of glass only in the laminate. U.S. Patent Application 2002/0020119 A1 teaches the use of special holder point attachment systems to allow optimum design of bolted glass and bolted glass laminates.

It can be desirable to have a bolted glass laminate and simple attachment system that can overcome the problems of a conventional bolted glass and bolted laminated glass systems.

SUMMARY OF THE INVENTION

In one aspect, the present invention is a direct-point attachment glazing (bolted glass) system comprising: (1) a polymer interlayer (2) at

least one sheet of glass; (3) at least one receptor for an attachment means; and (4) at least one attachment means, wherein the polymer interlayer is bonded on at least one surface to at least one sheet of glass, and wherein at least one receptor is adhesively bonded to the glass by the polymer interlayer in such a way that the receptor is positioned to mechanically accept the attachment means.

In another aspect the present invention is a process for preparing a glazing system suitable for direct-point attachment to a support structure comprising the steps: assembling a glass laminate comprising (1) a polymer interlayer (2) at least one sheet of glass; (3) at least one receptor for an attachment means; and (4) at least one attachment means, wherein the polymer interlayer is bonded on at least one surface to at least one sheet of glass, and wherein at least one receptor is adhesively bonded to the glass by the polymer interlayer in such a way that the receptor is positioned to mechanically accept the attachment means.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is section view of a bolted glass system comprising a first and a second glass ply bonded together by a polymer interlayer and further comprising a cylindrical threaded receptor that is open at one end for receiving an attachment means and closed at one end, wherein the receptor is embedded in the interlayer on all sides with the exception of the open end which is exposed at the surface of the first glass ply, and wherein the receptor does not pass below the surface of the second ply of glass.

Figure 2 is a variation of Figure 1 except that the receptor further comprises a lip that projects from the bottom portion of the closed end of the receptor essentially parallel to the surface of the glass and fully embedded in the thermoplastic polymer interlayer.

Figure 3 is a variation of Figure 1 except that the receptor passes through both plies of glass, the closed end of the receptor being flush with the exposed surface of the second glass ply.

Figure 4 is a variation of Figure 3 except that the receptor further comprises a lip that projects from the bottom portion of the closed end of the receptor essentially parallel the surface of the glass. The lip is bonded to the glass surface with a thin layer of polymer.

5 Figure 5 is a variation of Figure 1 except that the receptor comprises a countersunk geometry to allow flush mounting with one internal glass surface. The countersunk receptor wall is bonded to the countersunk glass hole with a thin layer of the polymer.

10 Figure 6 is a variation of Figure 5 except the countersunk receptor extends past one inner glass surface and is fully embedded in the polymer interlayer.

15 Figure 7 is a variation of Figure 5 except that the receptor comprises a countersunk geometry to allow flush mounting with one external glass surface. The countersunk receptor wall is bonded to the countersunk glass hole with a thin layer of polymer and the shaft of the receptor continues through the laminate and until the open end is flush with the external surface of the other glass ply. Attachment of the fastener is made to the open end of the receptor.

20 Figure 8 is a variation of Figure 3 except that the receptor is a dual receptor that is open on each end to both exposed glass surfaces, and can accept an attachment means from either glass surface.

 Figure 9 is a variation of Figure 8 except that the receptor in Figure 9 further comprises a lip that projects into the interlayer interspersed between the two glass plies.

25 Figure 10 is a receptor device that is embedded within the laminate and bonded directly to the polymer interlayer. It provides an internal solid surface for attachment of a fastener device.

30 Figure 11 is a variation of Figure 10 in which the receptor is again embedded in the laminate and is of such dimensions to be flush with the edges of the hole. Attachment is made to the fastener via a threaded surface on the receptor.

DETAILED DESCRIPTION OF THE INVENTION

DETAILED DESCRIPTION OF THE FIGURES

Figure 1 is a sectional view of a bolted glass system (10) comprising a first glass ply (14) and a second glass ply (16) bonded together by a polymer interlayer (18) and further comprising a cylindrical threaded receptor (12) that is open at one end for receiving an attachment means and closed at one end, wherein the receptor is embedded in the interlayer on all sides with the exception of the open end which is exposed at the surface of the first glass ply, and wherein the receptor does not pass below the surface of the second ply of glass.

Figure 2 is a sectional view of a bolted glass system (20) comprising a first glass ply (24) and a second glass ply (26) bonded together by a polymer interlayer (28) and further comprising a cylindrical threaded receptor (22) that is open at one end for receiving an attachment means and closed at one end, the closed end further comprises a lip (21) that projects from the bottom of the closed end, wherein the receptor is embedded in the interlayer on all sides with the exception of the open end which is exposed at the surface of the first glass ply, and wherein the receptor does not pass below the surface of the second ply of glass.

Figure 3 is sectional view of a bolted glass system (30) comprising a first glass ply (34) and a second glass ply (34) bonded together by a polymer interlayer (36) and further comprising a cylindrical threaded receptor (32) that is open at one end for receiving one attachment, wherein the receptor is embedded in the interlayer on all sides with the exception of the open end, which is exposed at the surface of the first glass ply, and the closed end of the receptor which is flush with the exposed surface of the second glass ply.

Figure 4 is a sectional view of a bolted glass system (40) comprising a first glass ply (44) and a second glass ply (44) bonded together by a polymer interlayer (46) and further comprising a cylindrical threaded receptor (42) that is open at one end for receiving one attachment, wherein the receptor is embedded in the interlayer on all sides

with the exception of the open end, which is exposed at the surface of the first glass ply, and the closed end of the receptor which is essentially flush with the exposed surface of the second glass ply and further comprises a lip (48) which is bonded to the surface of the second glass ply with a thin
5 layer of the polymer interlayer (46).

Figure 5 is a sectional view of a bolted glass system (50) comprising a first glass ply (54) and a second glass ply (56) bonded together by a polymer interlayer (58) and further comprising a countersunk threaded receptor (52) that is open at one end for receiving an attachment
10 means and closed at one end, wherein the receptor is flush-mounted with the interior surface of the first glass ply, and contacted by the interlayer on all sides with the exception of the open end, which is exposed at the surface of the first glass ply, and wherein the receptor does not pass below the surface of the second ply of glass.

Figure 6 is a sectional view of a bolted glass system (60) comprising a first glass ply (64) and a second glass ply (66) bonded together by a polymer interlayer (68) and further comprising a countersunk threaded receptor (62) that is open at one end for receiving an attachment
15 means and closed at one end, wherein the receptor is embedded in the interlayer on all sides with the exception of the open end which is exposed at the surface of the first glass ply, and wherein the receptor does not pass below the surface of the second ply of glass.
20

Figure 7 is a sectional view of a bolted glass system (70) comprising a first glass ply (74) and a second glass ply (76) bonded
25 together by a polymer interlayer (78) and further comprising a countersunk threaded receptor (72) that is open at one end for receiving an attachment means and closed at one end, wherein the open end of the receptor is flush-mounted with the external surface of the first glass ply and the closed end of the receptor is flush-mounted with the external surface of
30 the second glass ply, and contacted by the interlayer on all sides with the exception of the open and closed ends which are exposed at the external surfaces of the glass plies.

Figure 8 is a sectional view of a bolted glass system (80) comprising a first glass ply (84) and a second glass ply (84) bonded together by a polymer interlayer (88) and further comprising a cylindrical threaded receptor (82) that is open at both ends for receiving at up to two
5 attachments, wherein the receptor is embedded in the interlayer on all sides with the exception of the open ends which are exposed at the surfaces of the glass plies, the ends of the receptors being flush with the exposed surfaces of the glass.

Figure 9 is a sectional view of a bolted glass system (90) comprising a first glass ply (94) and a second glass ply (94) bonded together by a polymer interlayer (96) and further comprising a cylindrical threaded receptor (92) that is open at both ends for receiving at up to two
10 attachments, wherein the receptor further comprises a lip (93) that projects from the receptor, and the receptor is embedded in the interlayer on all
15 sides with the exception of the open ends which are exposed at the surfaces of the glass plies, the ends of the receptors being flush with the exposed surfaces of the glass.

Figure 10 is a sectional view of a bolted glass system (100) comprising a first glass ply (104) and a second glass ply (104) bonded together by a polymer interlayer (106) and further comprising an internal
20 threaded receptor (102) inside an opening (101) in the glass system, wherein the receptor provides a solid surface for attachment of an attachment means, wherein the threads are inset from the opening.

Figure 11 is a sectional view of a bolted glass system (110) comprising a first glass ply (114) and a second glass ply (114) bonded together by a polymer interlayer (116) and further comprising an internal
25 threaded receptor (112) inside an opening (111) in the glass system, wherein the receptor provides a solid surface for attachment of an attachment means, wherein the threads are flush with the opening.

30 In one embodiment, the present invention is a system for direct attachment of a receptor system to a tough polymer interlayer. In the event of accidental glass breakage the integrity of the unit is maintained by

transmitting any applied forces, for example self-weight, wind load and the like, through the polymer interlayer and receptor to the connection system to the building support system. This has a distinct advantage over conventional bolted laminated glass where system performance is
5 determined by transmission of forces through broken glass fragments. This latter condition is limiting in that glass fragments often lead to cutting and piercing of the interlayer and often break free, particularly during cyclic loading, that is, where the force exerted by a load on the laminate cycles from a positive direction to a negative direction. Conventional bolted
10 laminates are often seen to tear and pull loose from bolted fittings after accidental breakage. This problem is exacerbated at elevated temperatures, especially greater than 50°C. Further advantages of the systems sketched in Figures 1 through 9 include a lessened tendency for glass-polymer delamination in the vicinity of the hole since the glass-
15 polymer interface is essentially sealed internally from the external ambient humidity, which can play a role in delamination mechanisms. The receptor systems sketched in Figures 1, 2, 5 and 6 require only one hole to be fabricated in one glass ply thus obviating difficulties in aligning two holes in two different glass plies. These receptor systems that bolt to one glass ply
20 only will also facilitate the fabrication of bolted glass where insulated glass units, such as double and triple glazing are required for energy management.

The bolted glass systems disclosed herein allow all of the components -- that is, glass, polymer and receptor -- to be included as
25 structural elements in the design of bolted glass laminates for transparent structural facades.

In another embodiment, the present invention is a glazing system comprising a polymer interlayer interspersed between at least two plies of glass wherein the glazing system can be attached to a support structure
30 by direct-point attachment, wherein the direct point attachment is via a receptor for an attachment means, said receptor being embedded in the interlayer in such a manner as to accept the attachment means for

attachment to said support structure. Glass may be any one of the standard types: annealed, heat-strengthened or tempered, commonly used in architectural applications. The glass can be flat, curved, or tapered without affecting the practice of the present invention.

5 A support structure for the purposes of the present invention can be a window frame, a building, a wall, a panel, a ceiling, a floor, suspension wires, or any building structure or substructure having a load-bearing function.

10 A suitable attachment means can be any means for attaching the laminate to a support structure. Suitable attachment means can be, for example, bolts, clamps, nails, screws, rope, chains, tether, snaps, clips, and the like. With the proviso that the attachment means is sufficiently strong enough to form an appropriate support for the laminate structure.

15 A suitable receptor can be any feature that works together with an attachment means to form an attachment to a support structure. A suitable receptor can be constructed of any generally sturdy material such as: metals such as steel, aluminum, titanium, brass, lead, chrome, copper, and the like; engineering plastics such as polycarbonate, polyurethane, nylon, poly(alkyl)acrylates, poly(acetals) and the like; natural materials
20 such as stone, wood, or the like. Materials should be chosen based upon compatibility with the polymer interlayer and to minimize internal stresses in the laminate structure such as those that may result from incompatibilities between the glass, the receptor, and/or the polymer interlayer.

25 A suitable tough polymer interlayer can be any that can form an adhesive bond with glass and also with the material of construction used to form the receptor for the attachment means. A suitable thermoplastic interlayer can be an acid copolymer formed by copolymerization of an ethylenically unsaturated carboxylic acid with ethylene, or an ionomeric
30 polymer formed by full or partial neutralization of an acid copolymer. Suitable acid copolymer or ionomers can be purchased commercially from E.I. DuPont de Nemours and Company under the tradenames Surlyn® or

Nucrel®, for example. Particularly preferred are thermoplastic polymers consisting essentially of a water insoluble salt of a copolymer of ethylene and methacrylic acid or acrylic acid containing 14-28% by weight of the acid and having about 20-60% by weight of the acid neutralized with sodium ion, or zinc ion, or magnesium ion, or combinations thereof, and wherein the ionomer resin has a melt index of about 0.5 – 50. A suitable thermoplastic interlayer can also be stiff polyvinyl butyral having a low level of plasticization, or polyurethane. Preferably, a suitable polymer has a Storage Young's Modulus of 100 -1,000 MPa (mega Pascals) at 1.0 Hz and 25°C, as determined according to ASTM D 5026-95a. A suitable polymer interlayer can also be based on an in situ cured resin such as an acrylic or polyurethane system. Adhesion between receptor and thermoplastic interlayer may be enhanced chemically by treating the receptor with a chemical coupling agent, such as silane-based compounds and the like. Adhesion between receptor and thermoplastic interlayer may be enhanced mechanically by roughening the receptor surface by means such as machining, knurling, sand blasting and the like.

The laminate can be fabricated according to known and conventional glass lamination techniques, with the exception that the laminate must have holes that will accept the receptor and attachment means, and the thermoplastic interlayer must form an adhesive bond with the glass surfaces and also the receptor in such a manner that the interlayer, the receptor, and the glass surfaces are joined with a suitable adhesive force. Lamination temperatures can be dependent on the conditions of the lamination, including the pressure and the type of materials being laminated. Typically, temperatures above 100°C can be required to obtain a laminate of the present invention. One skilled in the art would know the proper lamination conditions to use. Examples of fabrication methods for thermoplastics include nip-roll prepress followed by autoclaving and vacuum bagging and autoclaving. Examples for resin laminates include liquid damming of the components, addition of the liquid

resin followed by ultraviolet curing, thermal curing or catalytically-induced curing.

EXAMPLES

The following Examples are presented to further illustrate the present invention. The Examples are not intended to limit the scope of the invention in any manner, nor should they be used to define the claims or specification in any manner that is inconsistent with the invention as claimed and/or as described herein.

Example 1 consists of a bolted glass receptor system as described in Figure 1. The system comprised a first and a second glass ply bonded together by an ethylene/acrylic acid copolymer ionomer, available from E.I. DuPont de Nemours and Company under the tradename of SentryGlas® Plus, and further comprised a stainless steel receptor for an attachment means. The receptor that had one open end for receiving an attachment means and one closed end was embedded in the interlayer on all sides with the exception of the open end which was exposed at the surface of the first glass ply. The receptor did not pass below the surface of the second ply of glass. The polymer-contacting surface of the receptor was knurled to enhance mechanical adhesion between the steel and polymer. The internal surface of the steel receptor was threaded for the attachment means. The system was fabricated by assembling the individual components and laminating by vacuum bagging and applying pressure at elevated temperatures. A method of ensuring good polymer flow around the receptor is to punch-out individual rings of DuPont SentryGlas® Plus with an internal diameter matched to the external diameter of the receptor and an external diameter matching the internal diameter of the hole in the glass. The thermoplastic interlayer was built up around the receptor with a series of DuPont SentryGlas® Plus rings. During autoclaving, the thermoplastic interlayer melted, flowed and welded to the rest of the thermoplastic interlayer forming the major in plane polymer component of the laminate. Bubble-free laminates were fabricated that exhibit good adhesion between glass, steel receptor and interlayer.

Example 2 consists of a bolted glass receptor system, a first and a second glass ply bonded together by a thermoplastic interlayer of DuPont SentryGlas® Plus as described in Figure 2. In this example a stainless steel receptor was a variant of that used in Example 1, where an additional lip was fabricated at the closed end of the receptor. The internal surface of the receptor was threaded for the attachment means and the polymer-contacting surface was knurled to promote adhesion. DuPont SentryGlas® Plus polymer rings were built up around the receptor during fabrication and a solid disk of DuPont SentryGlas® Plus placed on the bottom surface, where the lips extended. The receptor/ DuPont SentryGlas® Plus assembly was assembled with glass and a DuPont SentryGlas® Plus interlayer sheet, and laminated by vacuum bagging and applying pressure at elevated temperatures

Example 3 consists of a bolted glass stainless steel receptor, a first and a second glass ply bonded together by a thermoplastic interlayer of DuPont SentryGlas® Plus as described in Figure 3 and is a variation of Example 2 except that the stainless steel receptor passed through both plies of glass, the closed end of the receptor being flush with the exposed surface of the second glass ply. The internal surface of the receptor was threaded for the attachment means and the polymer-contacting surface knurled to promote adhesion. Fabrication consists of punching a hole in the DuPont SentryGlas® Plus interlayer, assembling rings of SentryGlas® Plus around the receptor, assembling the interlayer, rings, receptor and glass and laminating by vacuum bagging and applying pressure at elevated temperatures sufficient to cause the polymer to flow.

Example 4 consists of a bolted glass stainless steel receptor, a first and a second glass ply bonded together by a thermoplastic interlayer of SentryGlas® Plus as described in Figure 4 and was a variation of Example 3 except that the receptor further comprised a lip that projects from the bottom portion of the closed end of the receptor essentially parallel the surface of the glass. The lip was bonded to the glass surface with a thin layer of DuPont SentryGlas® Plus. The internal surface of the receptor

was threaded for the attachment means and the polymer-contacting surface knurled to promote adhesion. Fabrication consisted of punching a hole in the DuPont SentryGlas® Plus interlayer, assembling rings of DuPont SentryGlas® Plus around the receptor including a larger outer diameter ring to seal the lip to the top surface of the glass, assembling the interlayer, rings, receptor and glass and laminating by vacuum bagging and applying pressure at elevated temperatures sufficiently hot to cause the polymer to flow.

Example 5 consists of a bolted glass stainless steel receptor, a first and a second glass ply bonded together by a thermoplastic interlayer of DuPont SentryGlas® Plus as described in Figure 5 and was a variation of Example 1 except that the receptor comprised of a countersunk geometry to allow flush mounting with one internal glass surface. The internal surface of the receptor was threaded for attachment means. The countersunk receptor wall was bonded to the countersunk glass hole with a thin layer of the DuPont SentryGlas® Plus interlayer. This was achieved by molding a thin cup washer of DuPont SentryGlas® Plus at elevated temperatures that conformed to the countersunk receptor profile. The countersunk stainless steel receptor, DuPont SentryGlas® Plus cup washer, DuPont SentryGlas® Plus interlayer and glass were assembled and laminated by vacuum bagging and applying pressure at elevated temperatures.

Example 6 consists of a bolted glass stainless steel receptor system, a first and a second glass ply bonded together by a thermoplastic interlayer of DuPont SentryGlas® Plus as described in Figure 7 and was a variation of Example 5 except that the receptor comprised a countersunk geometry to allow flush mounting with one external glass surface. The shaft of the receptor was knurled to promote adhesion and continued through the laminate and until the open end is flush with the external surface of the other glass ply. Attachment of the threaded fastener was made to the open end of the receptor. The system was assembled by first adhesively attaching the countersunk portion of the receptor to one glass

ply using an epoxy adhesive. Rings of DuPont SentryGlas® Plus polymer were built up around the cylindrical portion of the receptor. A hole was punched in the DuPont SentryGlas® Plus interlayer, and the glass, receptor, and polymer system assembled and laminated by vacuum bagging and applying pressure at elevated temperatures, sufficiently high to make the polymer flow.

Example 7 consisted of a bolted glass stainless steel receptor system, a first and a second glass ply bonded together by a thermoplastic interlayer of DuPont SentryGlas® Plus as described in Figure 8 and was a variation of Example 3 except that the receptor was a dual receptor that was open on each end to both exposed glass surfaces, and able to accept an attachment means from either glass surface. The polymer-contacting surface of the receptor was knurled to enhance mechanical adhesion between steel and polymer. The internal surface of the steel receptor was threaded for the attachment means. Fabrication consisted of punching a hole in the DuPont SentryGlas® Plus interlayer, assembling rings of DuPont SentryGlas® Plus around the receptor, assembling the interlayer, rings, receptor and glass and laminating by vacuum bagging and applying pressure at elevated temperatures sufficient to cause the polymer to flow.

Example 8 consists of a bolted glass stainless steel receptor system, a first and a second glass ply bonded together by a thermoplastic interlayer of DuPont SentryGlas® Plus as described in Figure 9 and was a variation of Example 7 except that the receptor in Figure 9 further comprised a lip that projected into the interlayer interspersed between the two glass plies. The polymer-contacting surface of the receptor was knurled to enhance mechanical adhesion between steel and polymer. The internal surface of the steel receptor was threaded for attachment means. Fabrication consists of punching a hole in the DuPont SentryGlas® Plus interlayer, assembling rings of DuPont SentryGlas® Plus around the receptor. The DuPont SentryGlas® Plus rings contacting the internal lip are extended past the glass hole diameter out to the diameter of the internal receptor lip. The diameter of the punched hole in the interlayer

was matched to that of the internal receptor lip. The DuPont SentryGlas® Plus interlayer, stainless steel receptor, DuPont SentryGlas® Plus rings and glass were assembled and laminated by vacuum bagging and applying pressure at elevated temperatures sufficient to cause the polymer
5 to flow.

Example 9 consisted of a bolted glass poly(acetal) DuPont Delrin® receptor system, a first and a second glass ply bonded together by a thermoplastic interlayer of DuPont SentryGlas® Plus as described in Figure 10 where the receptor device was embedded within the laminate
10 and bonded directly to the DuPont SentryGlas® Plus interlayer. The receptor provided an internal solid surface for connection with a fastener device. The interlayer-contacting surfaces of the DuPont Delrin® receptor was knurled to enhance mechanical adhesion between DuPont Delrin® and DuPont SentryGlas® Plus interlayer. The internal surface of the
15 DuPont Delrin® receptor was a straight hole for attachment means. The system was assembled by first cutting a hole in the DuPont SentryGlas® Plus interlayer of diameter equal to the DuPont Delrin® receptor. Two thin disks of DuPont SentryGlas® Plus interlayer were placed on the large flat surfaces of the DuPont Delrin® receptor and assembled with the DuPont
20 SentryGlas® Plus interlayer and glass. The assembly was laminated by vacuum bagging and applying pressure at elevated temperatures, sufficient to cause the polymer to flow.

CLAIMS**WHAT IS CLAIMED IS:**

- 5 1. A direct-point attachment glazing (bolted glass) system comprising:
(1) a polymer interlayer (2) at least one sheet of glass; (3) at least
one receptor for an attachment means; and (4) at least one
attachment means, wherein the polymer interlayer is bonded on at
least one surface to at least one sheet of glass, and wherein at
least one receptor is adhesively bonded to the glass by the polymer
10 interlayer in such a way that the receptor is positioned to
mechanically accept the attachment means.
2. The bolted glass system of Claim 1, wherein said interlayer
comprises a thermoplastic polymer composition having a Storage
Young's Modulus of 100 -1,000 MPa (mega Pascals) at 1.0 Hz and
15 25°C, as determined according to ASTM D 5026-95a.
3. The bolted glass system of Claim 2, wherein said interlayer
consists essentially of a water insoluble salt of a copolymer of
ethylene and methacrylic acid or acrylic acid containing 14-28% by
weight of the acid and having about 20-60% by weight of the acid
20 neutralized with sodium ion, or zinc ion, or magnesium ion, or
combinations thereof, and the ionomer resin has a melt index of
about 0.5 – 50.
4. The bolted glass system of Claim 3 wherein the system is
constructed as shown in any of Figures 1 through 11.
- 25 5. The bolted glass system of Claim 3 wherein the system is
constructed as shown in Figure 1.
6. The bolted glass system of Claim 3 wherein the system is
constructed as shown in Figure 2.
7. The bolted glass system of Claim 3 wherein the system is
constructed as shown in Figure 3.
- 30 8. The bolted glass system of Claim 3 wherein the system is
constructed as shown in Figure 4.

9. The bolted glass system of Claim 3 wherein the system is constructed as shown in Figure 5.
10. The bolted glass system of Claim 3 wherein the system is constructed as shown in Figure 6.
- 5 11. The bolted glass system of Claim 3 wherein the system is constructed as shown in Figure 7.
12. The bolted glass system of Claim 3 wherein the system is constructed as shown in Figure 8.
13. The bolted glass system of Claim 3 wherein the system is constructed as shown in Figure 9.
- 10 14. The bolted glass system of Claim 3 wherein the system is constructed as shown in Figure 10.
- 15 15. The bolted glass system of Claim 3 wherein the system is constructed as shown in Figure 11.

THIS PAGE BLANK (USPTO)

1/3

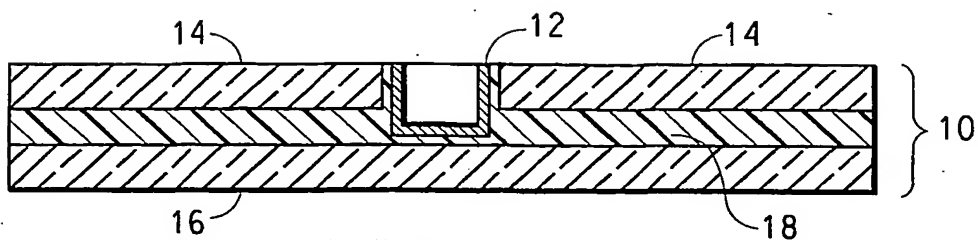


FIG. 1

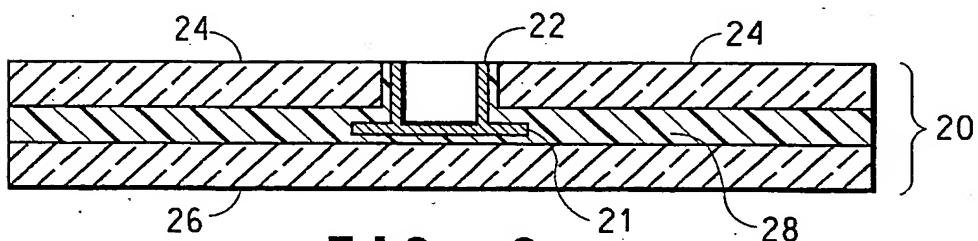


FIG. 2

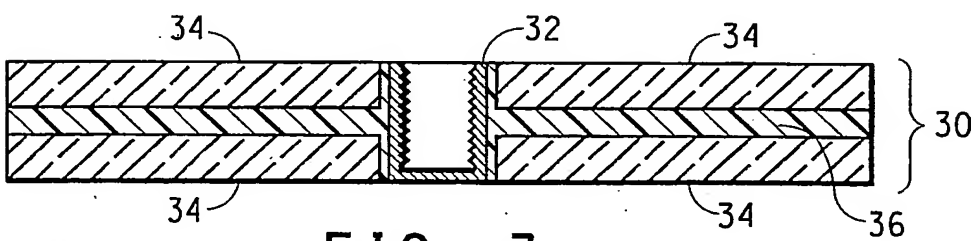


FIG. 3

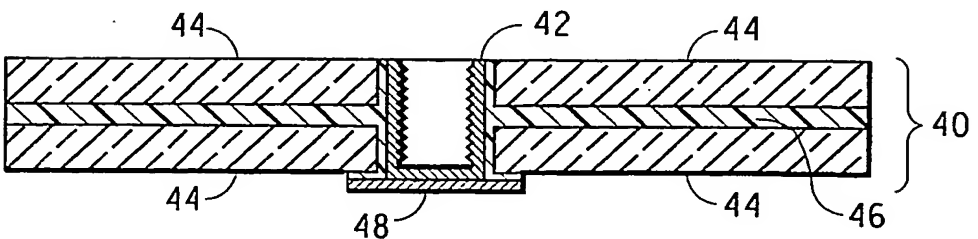


FIG. 4

0717 27 DEC 2014

THIS PAGE BLANK (USPTO)

2/3

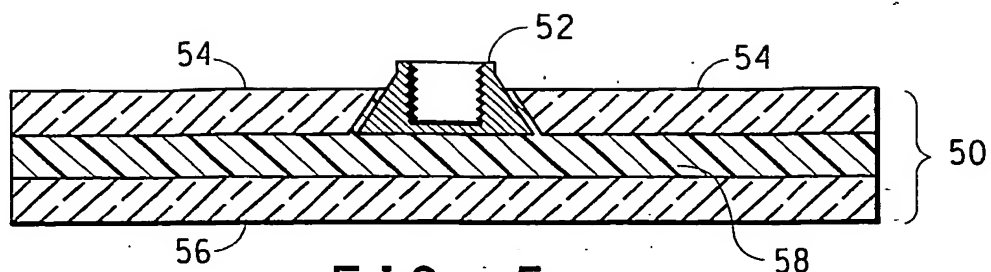


FIG. 5

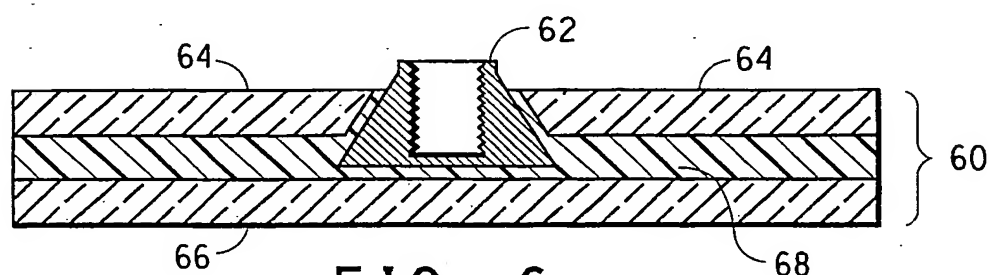


FIG. 6

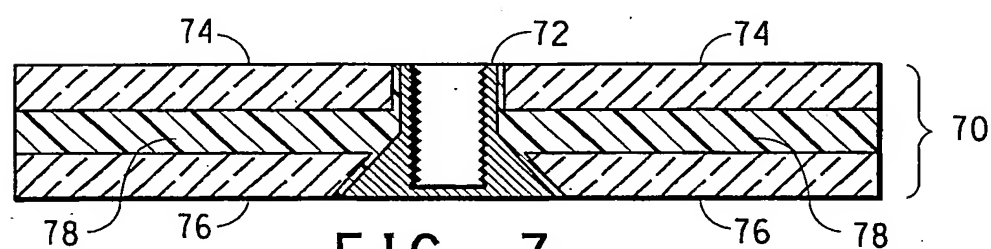


FIG. 7

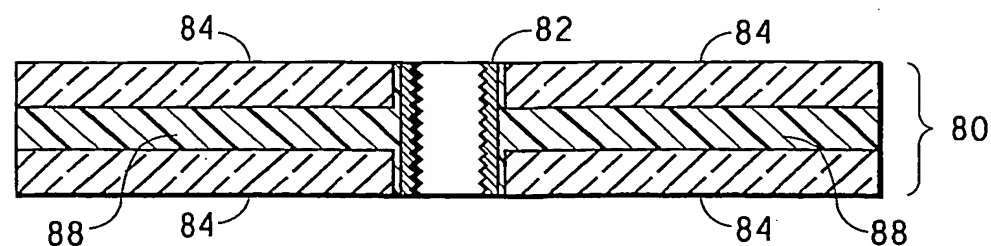


FIG. 8

DT15 REC 057773 27 DEC 2004

THIS PAGE BLANK (USPTO)

3/3

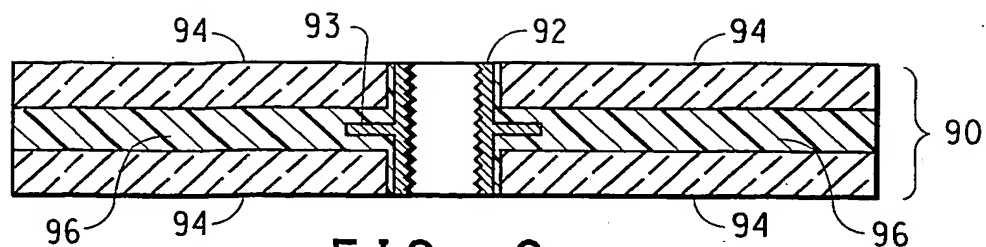


FIG. 9

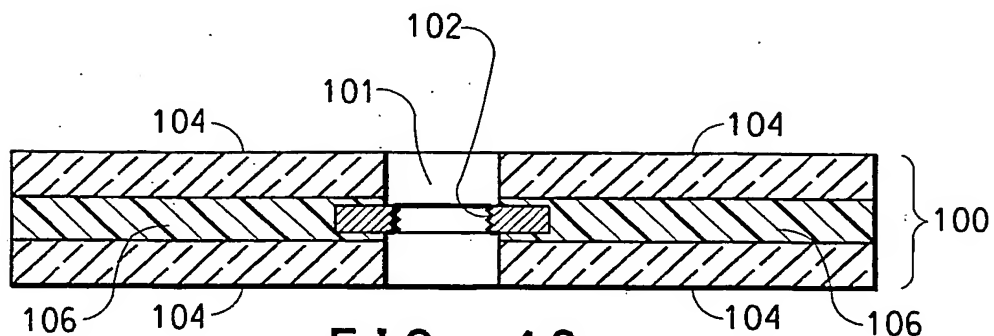


FIG. 10

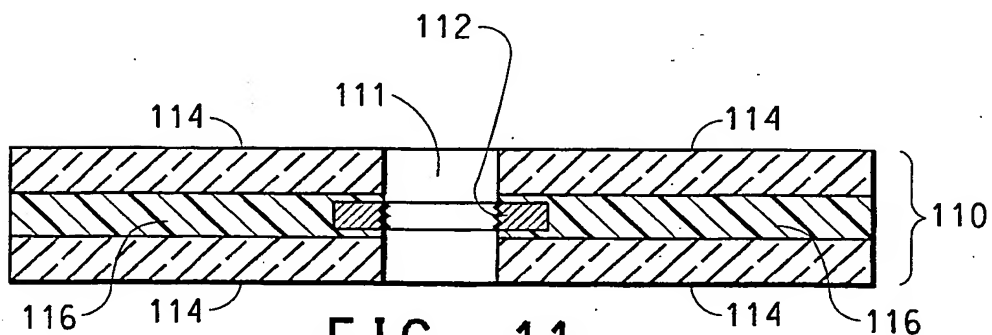


FIG. 11

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

Application No

PCT/US 03/24118

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 E06B3/54 E04B2/92 E04F13/14 B32B17/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E06B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 340 089 A (VER GLASWERKE GMBH ; SAINT GOBAIN VITRAGE (FR)) 2 November 1989 (1989-11-02)	1
Y	column 1, line 62 -column 4, line 5; figures	2-6
X	WO 00 76763 A (SOBEK WERNER.; WERNER SOBEK INGENIEURE GMBH (DE)) 21 December 2000 (2000-12-21) page 9, paragraph 2 -page 10, paragraph 1 page 12, paragraph 5 -page 13, paragraph 1 claims 1,14,15 figure 3	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

9 December 2003

Date of mailing of the international search report

16/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Depoorter, F

INTERNATIONAL SEARCH REPORT

International Publication No.

PCT/US 99/24118

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 99 58334 A (BENNISON STEPHEN JOHN ; SMITH CHARLES ANTHONY (US); DU PONT (US); W) 18 November 1999 (1999-11-18) page 1, line 21 - line 28 page 2, line 13 - page 4, line 13 claims 1-3, 9, 10 figure 1 ---	2-6
A	WO 96 22443 A (PILKINGTON GLASS LTD ; JACQUES NEIL WILLIAM (GB); ROBERTS DAVID RAY) 25 July 1996 (1996-07-25) page 6, paragraph 4 - page 7, paragraph 1 page 8, paragraph 2 - paragraph 3 figures ----	1, 4, 9-11
A	US 2001/023562 A1 (BLOBAUM ERNST UDO ET AL) 27 September 2001 (2001-09-27) paragraph '0036! - paragraph '0041!; figures 2-4 ---	1, 4, 12-15
A	FR 2 732 730 A (HEY RENE) 11 October 1996 (1996-10-11) figures -----	7-11

INTERNATIONAL SEARCH REPORT

Application No
PCT/US 03/24118

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0340089	A	02-11-1989	FR	2630766 A1	03-11-1989
			AT	78550 T	15-08-1992
			DE	3908983 A1	09-11-1989
			DE	68902172 D1	27-08-1992
			DE	68902172 T2	18-02-1993
			EP	0340089 A1	02-11-1989
			ES	2034671 T3	01-04-1993
WO 0076763	A	21-12-2000	DE	10022446 A1	15-11-2001
			AU	5403600 A	02-01-2001
			WO	0076763 A1	21-12-2000
			EP	1192042 A1	03-04-2002
WO 9958334	A	18-11-1999	AU	3899699 A	29-11-1999
			CA	2330157 A1	18-11-1999
			EP	1105287 A1	13-06-2001
			JP	2002514533 T	21-05-2002
			WO	9958334 A2	18-11-1999
WO 9622443	A	25-07-1996	AU	4395596 A	07-08-1996
			WO	9622443 A1	25-07-1996
			ZA	9600102 A	17-07-1996
US 2001023562	A1	27-09-2001	DE	19915478 A1	26-10-2000
			AU	4115500 A	23-10-2000
			CA	2332785 A1	12-10-2000
			WO	0060206 A2	12-10-2000
			EP	1086288 A1	28-03-2001
			FI	20002243 A	11-10-2000
			HU	0101412 A2	28-09-2001
			PL	345843 A1	14-01-2002
FR 2732730	A	11-10-1996	FR	2732730 A1	11-10-1996

THIS PAGE BLANK (USPTO)